




机座 Diameter 54 mm

- 1、使用环境: -10—40℃
Environmental conditions:-10—40℃
- 2、极数: 2
Number of Poles:2
- 3、磁钢材料: 铁氧体
Magnet material:Hard Ferrit
- 4、绝缘等级: B
Insulation Class:B
- 5、可以提供电压、转轴等专门设计
We can design the special voltage and shaft, and so on.

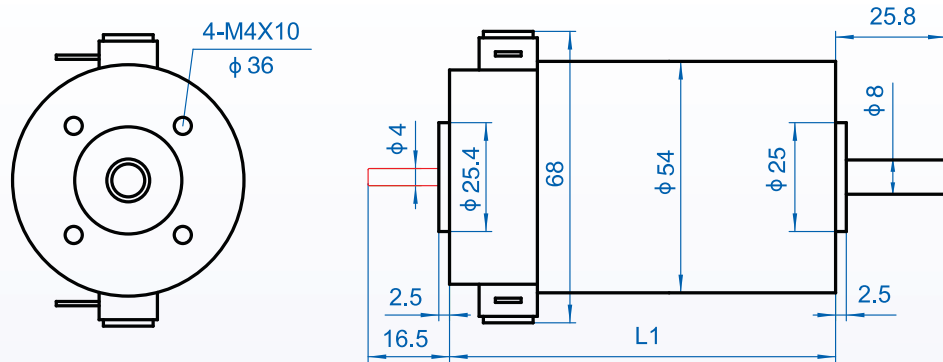

型号 Model		54ZYT01	54ZYT02	54ZYT03	54ZYT04
电压 Voltage	V	24			
空载转速 No load speed	rpm	4000			
额定转矩 Rated torque	Nm	0.07	0.15	0.26	0.36
额定转速 Rated speed	rpm	3200	3300	3300	3300
额定电流 Rated current	A	1.65	3.20	5.30	7.20
堵载转矩 Stall torque	Nm	0.35	0.76	1.40	1.80
堵载电流 Stall current	A	7.0	14.9	27.3	35.6
惯量 Rotor inertia	Kgmm ²	115	215	370	480
反电势 Back-EMF constant	V/krpm	5.77	5.77	5.77	5.77
转矩常数 Torque Constant	Nm/A	0.055	0.055	0.055	0.055
电阻 Resistance(20℃)	ohm	3.45	1.65	0.88	0.68
重量 Weight	Kg	0.60	0.90	1.3	1.6
长度 L1	mm	75	94	126	145
铁芯长度 Rotor: La	mm	17	36	66	86

机座 Diameter 54 mm | 直流电机 DC MOTORS

