

机座 Diameter 62 mm




1、使用环境: -10—40℃
Environmental conditions:-10—40℃

2、极数: 2
Number of Poles:2

3、磁钢材料: 铁氧体
Magnet material:Hard Ferrit

4、绝缘等级: B
Insulation Class:B

5、可以提供电压、转轴等专门设计
We can design the special voltage and shaft, and so on.

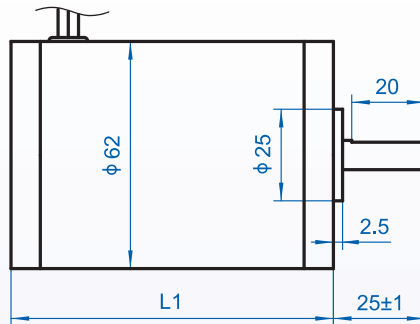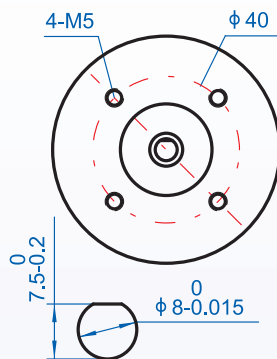

型号 Model		62ZYT01	62ZYT02	62ZYT03
电压 Voltage	V	24		
空载转速 No load speed	rpm	4000		
额定转矩 Rated torque	Nm	0.20	0.25	0.35
额定转速 Rated speed	rpm	3600	3600	3600
额定电流 Rated current	A	3.85	4.80	6.70
堵载转矩 Stall torque	Nm	2.20	2.80	3.60
堵载电流 Stall current	A	39.4	50.0	65.0
惯量 Rotor inertia	Kgmm ²	48.0	60.0	72.0
反电势 Back-EMF constant	V/krpm	5.94		
转矩常数 Torque Constant	Nm/A	0.0567		
电阻 Resistance(20℃)	ohm	0.61	0.48	0.37
重量 Weight	Kg	1.0	1.4	2.0
长度 L1	mm	98	108	118
铁芯长度 Rotor: La	mm	35	45	55

机座 Diameter 62 mm | 直流电机 DC MOTORS

