




机座 Diameter 42 mm

- 1、使用环境: -10—40℃
Environmental conditions:-10—40℃
- 2、极数: 2
Number of Poles:2
- 3、磁钢材料: 铁氧体
Magnet material:Hard Ferrit
- 4、绝缘等级: B
Insulation Class:B
- 5、可以提供电压、转轴等专门设计
We can design the special voltage and shaft, and so on.

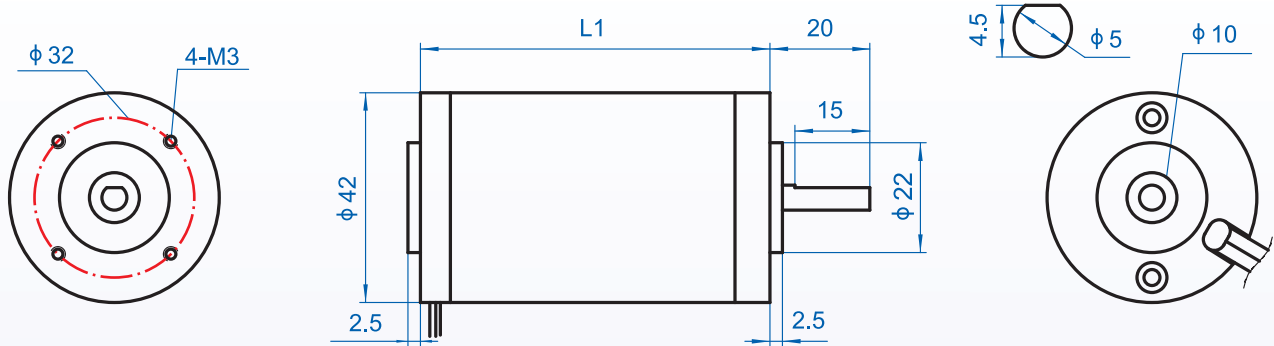

型号 Model		42ZYT01	42ZYT02	42ZYT03
电压 Voltage	V	24		
空载转速 No load speed	rpm	4000		
额定转矩 Rated torque	mNm	30	50	70
额定转速 Rated speed	rpm	3480	3350	3350
额定电流 Rated current	A	0.64	1.10	1.40
堵载转矩 Stall torque	mNm	220	300	400
堵载电流 Stall current	A	4.2	5.6	7.5
惯量 Rotor inertia	Kgmm ²	11.6	15.4	19.3
反电势 Back-EMF constant	V/krpm	5.84	5.84	5.84
转矩常数 Torque Constant	mNm/A	55.8	55.8	55.8
电阻 Resistance(20℃)	ohm	5.8	4.1	3.2
重量 Weight	Kg	0.3	0.4	0.5
长度 L1	mm	80	90	100
铁芯长度 Rotor: La	mm	25	35	45

机座 Diameter 42 mm | 直流电机 DC MOTORS

